

BSI Standards Publication

Fasteners - Acceptance inspection



BS EN ISO 3269:2019 BRITISH STANDARD

National foreword

This British Standard is the UK implementation of EN ISO 3269:2019. It is identical to ISO 3269:2019. It supersedes BS EN ISO 3269:2001, which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee FME/9, Fasteners.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2019 Published by BSI Standards Limited 2019

ISBN 978 0 580 98353 5

ICS 21.060.01

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 October 2019.

Amendments/corrigenda issued since publication

Date Text affected

EUROPEAN STANDARD NORME EUROPÉENNE EUROPÄISCHE NORM

EN ISO 3269

September 2019

ICS 21.060.01

Supersedes EN ISO 3269:2000

English Version

Fasteners - Acceptance inspection (ISO 3269:2019)

Fixations - Contrôle réception (ISO 3269:2019)

Mechanische Verbindungselemente - Annahmeprüfung (ISO 3269:2019)

This European Standard was approved by CEN on 4 July 2019.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION COMITÉ EUROPÉEN DE NORMALISATION EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

European foreword

This document (EN ISO 3269:2019) has been prepared by Technical Committee ISO/TC 2 "Fasteners" in collaboration with Technical Committee CEN/TC 185 "Fasteners" the secretariat of which is held by BSI.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by March 2020, and conflicting national standards shall be withdrawn at the latest by March 2020.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN ISO 3269:2000.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Endorsement notice

The text of ISO 3269:2019 has been approved by CEN as EN ISO 3269:2019 without any modification.

Con	itents		Page
Fore	word		iv
Intro	duction		v
1	Scope		1
2	Normative references		1
3	Terms and definitions		1
4	Symbols		2
5	5.1 General requirements 5.2 Inspection procedures. 5.2.1 General 5.2.2 Sample size 5.2.3 Inspection mod	dalities categories	
6	6.1 General 6.2 Purchaser's options for	or lot disposition procedure	5 6
Anne	x A (informative) Sampling pla	ns basics	7
Anne	x B (inform <mark>ative) Operating cha</mark>	aracteristic of sampling plans	9
Bibli	ography		10

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 2, Fasteners, Subcommittee SC 7, Reference standards.

This fourth edition cancels and replaces the third edition (ISO 3269:2000), which has been technically revised.

The main changes compared to the previous edition are as follows:

- introduction of an additional approach for incoming inspection with smaller sample sizes based on $N_A = 0$;
- use of a reference approach in case agreement is not reached;
- sample size specified on the basis of lot size;
- addition of informative $\underline{\text{Annexes A}}$ and $\underline{\text{B}}$ explaining the basis for sample size selection.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

The manufacturer of fasteners is expected to take due care and apply process control (see ISO 16426) during production in order to minimize the chances of producing parts that do not satisfy requirements of the standard or technical specification to which they are specified. Although every fastener should meet all the specified requirements, this objective is not guaranteed in mass production.

The purchaser of fasteners is expected to decide whether it is reasonable to assume that the delivered fasteners were made to specification. Considering the limitations of inspection by attributes of a fastener inspection lot, it is desirable that both the purchaser and the manufacturer (or supplier) possess a clear understanding of the acceptance inspection procedure to be used by the purchaser. This document describes an inspection procedure for use by the purchaser where no prior agreement exists.

Such acceptance inspection cannot provide complete confidence that non-conforming fasteners do not exist within a production lot. Conversely, the acceptance of a lot based on acceptance quality limit (AQL) values in this document does not imply that the supplier has a right to knowingly supply non-conforming fasteners.

This fourth edition introduces a layered approach for incoming acceptance inspection that begins with small sample sizes associated with a sampling plan based on Ac = 0.





Fasteners — Acceptance inspection

1 Scope

This document specifies an inspection procedure to be used by the purchaser where no prior agreement exists.

It also specifies a reference acceptance procedure for acceptance or rejection of an inspection lot, when no agreement can be reached between the purchaser and the supplier, or where conformance to specification is disputed.

It applies to inspection lots of bolts, screws, studs, nuts, pins, washers, rivets and other related fasteners.

This document applies to fasteners not intended for high volume machine assembly, special-purpose applications or specially engineered applications requiring more advanced in-process control and lot traceability.

For in-process control or final inspection by the manufacture and sorting, see ISO 16426.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1891-4, Fasteners — Vocabulary — Part 4: Control, inspection, delivery, acceptance and quality

ISO 2859-1:1999, Sampling procedures for inspection by attributes — Part 1: Sampling schemes indexed by acceptance quality limit (AQL) for lot-by-lot inspection

ISO 3534-2, Statistics — Vocabulary and symbols — Part 2: Applied statistics

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 1891-4, ISO 2859-1 and ISO 3534-2 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at https://www.iso.org/obp
- IEC Electropedia: available at http://www.electropedia.org/

3.1

inspection lot

quantity of fasteners of the same designation received from the same supplier at the same time and, if available, of the same manufacturing lot number

3.2

characteristic

dimensional element, mechanical, physical or functional property or other recognizable product feature for which limits are specified

EXAMPLE Head height, body diameter, tensile strength or hardness.

3.3

acceptance quality limit AQL

acceptable percentage of non-conforming fasteners in an *inspection lot* (3.1) corresponding to a specific probability of acceptance defined in the AQL index

Note 1 to entry: AQL_{95} is the percentage of non-conforming fasteners where the inspection lot has a 95 % chance of being accepted by the purchaser under the sampling plan; in other words, the supplier's risk of rejection is less than 5 %.

3.4

limiting quality

LQ

percentage of non-conforming fasteners in an *inspection lot* (3.1) corresponding to a specific probability of acceptance defined in the LQ index

Note 1 to entry: LQ_{10} is the percentage of non-conforming fasteners where the inspection lot has a 10 % chance of being accepted by the purchaser under the sampling plan; in other words, the consumer's risk of accepting the lot is less than 10 %.

Note 2 to entry: For a given sampling plan, limiting quality (LQ) and acceptance quality limit (AQL) are linked in the corresponding operating characteristic (OC) curve.

4 Symbols

For the purposes of this document, the following symbols apply.

Ac acceptance number

Re rejection number

LQ₁₀ limiting quality at 10 % probability of acceptance, in per cent

 AQL_{qq} acceptance quality limit at 95 % probability of acceptance, in per cent

N lot size

 P_a probability of acceptance, in per cent

5 Incoming acceptance inspection procedures for fasteners

5.1 General requirements

The requirements of this document shall apply to fasteners as delivered by the supplier, i.e. without alteration from the as-delivered condition. In case of alteration or further processing performed by the purchaser, the purchaser shall assume responsibility for conformance of all characteristics altered by such processing.

This document applies after receiving the fasteners, before releasing the lot to any subsequent processing.

Inspections according to this document shall be performed in accordance with <u>Tables 1</u> and <u>2</u>.

In case of non-conformity found during inspection, <u>6.2</u> and/or <u>6.3</u> shall apply.

The purchaser shall give the supplier the opportunity to verify any alleged non-conformity prior to any disposition.

5.2 Inspection procedures

5.2.1 General

The purchaser can choose this document to verify that the fasteners comply with the technical requirements of the product standard or other specified requirements.

5.2.2 Sample size

Sample size shall be based on the size of the inspection lot specified in <u>Table 1</u>. If the sample size is greater than the lot size, 100 % inspection is required for non-destructive tests.

Sample size, acceptance number, Ac, and rejection number, Re, for each selected characteristic shall be determined individually.

5.2.3 Inspection modalities

Inspection category for the characteristic being inspected shall be in accordance with <u>Table 2</u>, which lists the primary characteristics of various fastener types.

The selection of the characteristics for inspection shall be at the discretion of the purchaser. The purchaser is not required to inspect all characteristics listed in <u>Table 2</u>. The purchaser shall decide which characteristics to inspect based on their impact on the form, fit and function of the fasteners used.

The purchaser can select any other characteristics specified in the relevant product standard or in other technical specifications for inspection.

NOTE The frequency and extent of acceptance inspection are at the discretion of the purchaser and are related to previous experience with the supplier and the purchaser's opinion of the critical nature of the fastener and its application.

Mechanical, physical and functional properties shall be inspected as specified in the relevant basic and reference standards (e.g. ISO 898-1, ISO 3506-2, ISO 16047, ISO 10683, ISO 6157-1).

Dimensional characteristics shall be inspected in accordance with relevant product standards and/or technical specifications.

The inspection of a listed mechanical, physical or functional characteristic can include several tests and/or test results (e.g. tensile strength may be tested using full-size, wedge tensile or specimens).

A listed dimensional characteristic can include several features (e.g. inspecting the drive for a hexagon head includes measuring width across flats, width across corners and minimum wrenching height).

5.3 Acceptance inspection categories

<u>Table 1</u> specifies sampling plans for acceptance inspection. Categories 1, 2 and 3 are explained in <u>Annex A</u>. Category 3 sampling plans are selected from ISO 2859-1.

For more information on sampling concept, see <u>Annex B</u>.

Table 1 — Sampling plan

	Sample size, acceptance number, Ac, and rejection number, Re						
	Category 1 ^a	Catego	ory 2 ^b	Category 3 ^c			
Lot size, N		Initial sample	Additional sample				
	Ac = 0 Re = 1	Ac = 0 $Re = 2$	Ac = 0 $Re = 1$				
2 to 50	1	4	4	No	t applicable		
51 to 90	1	5	5	5	Ac = 1 Re = 2		
91 to 150	1	6	6	6	Ac = 1 Re = 2		
151 to 280	1	7	7	7	Ac = 1 Re = 2		
281 to 500	2	9	9	9	Ac = 1 Re = 2		
501 to 1 200	2	11	11	11	Ac = 1 Re = 2		
1 201 to 3 200	2	13	13	13	Ac = 1 Re = 2		
3 201 to 35 000	3	15	15	15	Ac = 2 Re = 3		
35 001 to 500 000	5	20	20	20	Ac = 2 Re = 3		
Over 500 000	8	20	20	20	Ac = 2 Re = 3		

^a **Category 1** – characteristics for which the acceptance number, Ac, is zero. Category 1 characteristics include all mechanical and functional properties which are typically inspected by means of destructive tests. If non-conformity is found in the sample, the lot or shipment is rejected. Disposition according to <u>6.2</u> and/or <u>6.3</u> shall apply.

^c Category 3 – characteristics for which the acceptance number, Ac, is one non-conformity or more, as specified in Table 2. Category 3 characteristics are minor dimensional properties and certain functional properties where some degree of non-conformity is tolerated. If more than the specified acceptable non-conformities are found in the sample, the lot or shipment is rejected. Disposition in accordance with <u>6.2</u> and/or <u>6.3</u> shall apply.



b Category 2 – characteristics for which the acceptance number, Ac, is zero, but in case of a non-conformity, a second sample may be taken. Category 2 characteristics are major dimensional properties that can affect the fit or function of the fastener. If, however, a single non-conformity is found in the first sample, an additional sample equal to the first sample size shall additionally be inspected for that characteristic. If zero non-conformity is found in the additional sample for that characteristic, the lot is accepted. If the lot or shipment is rejected, disposition in accordance with 6.2 and/or 6.3 shall apply.

Table 2 — Designated inspection categories

Fastener characteristics		Externally threaded fasteners	Internally threaded fasteners	Washers	Pins	Rivets
	Hardness	1	1	1	1	1
	Tensile strength	1	_	_	_	_
Mechanical	Proof load	_	1	_	_	_
and physical	Breaking torque	1		_	_	_
properties	Shear strength	_	_	_	1	1
	Others (including material and surface discontinuities)	1	1	1	1	1
	Drive, recess and slot	2	2	_	_	_
	Height	2	2	2	2	2
	Shank diameter	2	_	_	2	2
	Length, thread length	2		_	2	2
Dimensional characteristics	Thread diameter <i>d</i> , <i>D</i> (external diameter for externally threaded parts, internal diameter for internally threaded parts)	2	2	_	_	_
	Internal diameter	_	_	2	_	_
	External diameter	_	_	2	_	_
	Thickness	_		2	_	A -A.
	Others	3	3	3	3	3
	Prevailing torques	3	3	/ – Y	_	245
D	Torque/clamp force relationship	3	3		_	_
Functional properties	Thread GO gauging	3	3	_	_	
properties	Others (destructive tests)	1	1	1	1	1
	Others (non-destructive tests)	3	3	3	3	3

6 Result of inspection and disposition

6.1 General

If no non-conformity is found with the samples inspected and/or tested, the inspection lot shall be accepted.

For categories 2 and 3, if non-conformities are found but satisfy the acceptance number (Ac) criteria specified in Table 1, the inspection lot shall be accepted.

NOTE Lot acceptance in accordance with this document does not presume that the accepted lot is free of non-conforming parts (see Introduction).

If non-conformities are found that exceed the acceptance number (Ac) criteria specified in <u>Table 1</u>, the purchaser shall reach a disposition agreement with the supplier in accordance with <u>6.2</u>.

If the purchaser and supplier cannot agree on the acceptance or rejection of an inspection lot in accordance with 6.2, they shall apply disposition in accordance with 6.3.

Non-conformities shall be declared on the basis of appropriate test, measurement and/or gauging methods and related appropriate equipment.

6.2 Purchaser's options for lot disposition

In case of non-conformity found by performing inspection in accordance with <u>5.2</u>, the purchaser shall choose from the following options:

If the purchaser assumes that the non-conformity will have no significant effect on the performance in the intended service application:

a) the purchaser accepts the inspection lot.

Otherwise, the following options can be chosen:

- b) return the lot to the supplier;
- c) sort and/or inspect the lot to remove the non-conforming parts;
- d) rework or reprocess the parts to correct the non-conformity;
- e) scrap the lot.

The purchaser shall have approval from the supplier before any activity, such as sorting, reworking, reprocessing, scrapping, or returning the lot, when such action impacts the supplier.

A non-conforming lot of fasteners shall not be presented for re-inspection until one of the options above has been completed.

6.3 Reference acceptance procedure

If the purchaser and supplier cannot agree on the acceptance or rejection of an inspection lot in accordance with <u>6.2</u>, for example if the validity of the testing is questioned, the parties shall select a mutually agreed upon competent third party laboratory to test the non-conforming characteristic as specified above. The additional third-party inspection results shall serve as the basis for the purchaser and supplier to agree upon one of the options in <u>6.2</u>.

Annex A (informative)

Sampling plans basics

Acceptance inspection is generally performed by the purchaser to confirm by inspection whether it is reasonable to assume that the delivered fasteners were made to specification. Table 1 provides acceptance inspection sampling plans for three categories of characteristics based on different statistical approaches having different customer and supplier risk consequences. The selection of a sampling plan and suitable tests are the responsibility of the party conducting the acceptance inspection.

Category 1 characteristics are for mechanical properties that are critical to the function of the fastener. It is assumed that a process parameter deviation in mass production will lead to non-conformity in a substantial proportion of the lot and is expected to be detected in a small sample. Based on this assumption, acceptance inspection sampling plans for category 1 properties require acceptance number Ac = 0 and do not provide statistical information. When non-conformity is found, in-depth investigation is required to reach agreement about disposition of the lot (see Clause 6).

Category 2 characteristics are for dimensional properties that can influence the usability of the fastener. It is assumed there is a statistical distribution of the characteristic resulting from normal variation in production processes. Category 2 sampling plans are based on acceptance number Ac = 0; however, a single non-conformity does not automatically require rejection of the lot. An additional sampling with the same acceptance number Ac = 0 increases confidence in conformance of the lot while avoiding rejections based on a single detected non-conformity.

Sample sizes for category 2 characteristics are selected to provide "consumer risk" similar to a 6,5 AQL plan and are selected from OC curves for single sampling plans shown by Reference [7]. The term "consumer risk" is described by values for the quality level expressed in percentage of non-conforming parts, with a 10 % probability of being accepted. See Table A.1 (LQ $_{10}$). The term "supplier risk" is described by values for the quality level expressed in percentage of non-conforming parts, with a 95 % probability of being accepted. See Table A.1 (AQL $_{95}$). These values apply only for single inspection. Taking an additional sample after finding a non-conforming part in first sample is not considered.

Category 3 characteristics are for dimensional properties and certain functional properties where some degree of non-conformity is tolerated. It is assumed that there is a statistical distribution of the characteristic resulting from normal variation in production processes. Category 3 sampling plans are based on an acceptance number, Ac, greater than zero. Sample sizes for Category 3 characteristics are chosen from ISO 2859-1:1999, Table 1, level S3. Ac values connected with AQL_{95} are taken from ISO 2859-1:1999, Table 2-A.

Table A.1 — Sampling plans – Consumer risk $\rm LQ_{10}$ – Supplier risk $\rm AQL_{95}$

	Category	2 (1st inspection run)		Category 3			
Lot size, N	Ac = 0	LQ ₁₀	AQL ₉₅	Campla	Acceptance number	AQL ₉₅	
not size, it	Sample size	$P_{\rm a} = 10 \%$	P _a = 95 %	Sample size		P _a = 95 %	
2 to 50	4	42,44	1,25	NA		_	
51 to 90	5	36,10	1,00	5	Ac = 1	7,6	
91 to 150	6	31,33	0,83	6	Ac = 1	6,2	
151 to 280	7	27,73	0,72	7	Ac = 1	5,3	
281 to 500	9	22,39	0,56	9	Ac = 1	4,1	
501 to 1 200	11	18,80	0,46	13	Ac = 1	3,3	
1 201 to 3 200	13	16,10	0,39	13	Ac = 1	2,8	
3 201 to 35 000	15	15,40	0,33	15	Ac = 2	5,7	
35 001 to 500 000	20	10,9	0,26	20	Ac = 2	4,2	
Over 500 000	20	10,9	0,26	20	Ac = 2	4,2	


Annex B (informative)

Operating characteristic of sampling plans

The following presents the relationship existing between the sampling plan (sample size, acceptance number) and the AQL and LQ values.

Each sampling plan is described by its operating characteristic (OC) curve (see examples in Figure B.1). These curves show the probability of acceptance in a sampling inspection as a function of the actual percentage of non-conforming fasteners in the inspection lot. The points on the operating characteristic curves indicating a 95 % and a 10 % probability of acceptance have been selected for the determination of suitable sampling. The 95 % point on the OC curve is required to be greater than or equal to the AQL value specified. Selection of the 10 % point on the OC curve (LQ $_{10}$ value) is at the purchaser's discretion. The LQ $_{10}$ value corresponds to the percentage of non-conforming fasteners in inspection lots that are highly likely (90 % probability) to be rejected.

For each single characteristic, a sampling plan 32/1 means that, out of 32 tested fasteners, 1 can show non-conformity and the lot is still accepted on the basis of a specified figure of $AQL_{95} = 1$.

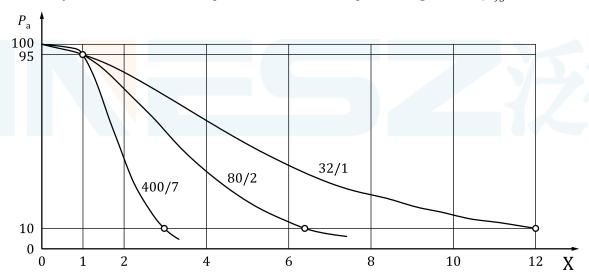

Key

X percentage of non-conforming fasteners

Figure B.1 — Example of operating characteristic (OC) curves for sampling plans for $AQL_{95} = 1$

Bibliography

- [1] ISO 898-1, Mechanical properties of fasteners made of carbon steel and alloy steel Part 1: Bolts, screws and studs with specified property classes Coarse thread and fine pitch thread
- [2] ISO 3506-2, Mechanical properties of corrosion-resistant stainless steel fasteners Part 2: Nuts
- [3] ISO 6157-1, Fasteners Surface discontinuities Part 1: Bolts, screws and studs for general requirements
- [4] ISO 10683, Fasteners Non-electrolytically applied zinc flake coating systems
- [5] ISO 16047, Fasteners Torque/clamp force testing
- [6] ISO 16426, Fasteners Quality assurance system
- [7] SQUEGLIA Nicholas L., ZERO ACCEPTANCE NUMBER SAMPLING PLANS, fifth edition, ASQ Quality press, Milwaukee, Wisconsin



British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards -based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI <u>publications</u>, including British and adopted European and international standards, through our website at bsigroup. com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Copyright in BSI publications

All the content in BSI publications, including British Standards, is the property of and copyrighted by BSI or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use.

Save for the provisions below, you may not transfer, share or disseminate any portion of the standard to any other person. You may not adapt, distribute, commercially exploit or publicly display the standard or any portion thereof in any manner whatsoever without BSI's prior written consent.

Storing and using standards

Standards purchased in soft copy format:

- A British Standard purchased in soft copy format is licensed to a sole named user for personal or internal company use only.
- The standard may be stored on more than one device provided that it is
 accessible by the sole named user only and that only one copy is accessed at
 any one time.
- A single paper copy may be printed for personal or internal company use only.

Standards purchased in hard copy format:

- A British Standard purchased in hard copy format is for personal or internal company use only.
- It may not be further reproduced in any format to create an additional copy.
 This includes scanning of the document.

If you need more than one copy of the document, or if you wish to share the document on an internal network, you can save money by choosing a subscription product (see 'Subscriptions').

Reproducing extracts

For permission to reproduce content from BSI publications contact the BSI Copyright and Licensing team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email cservices@bsigroup.com.

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Useful Contacts

Customer Services

Tel: +44 345 086 9001
Email: cservices@bsigroup.com

Subscriptions

Tel: +44 345 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

